


# MAF

## C4



**MAF beyond MAF  
from 1400 mm to 1850 mm**

The variable height that makes the difference

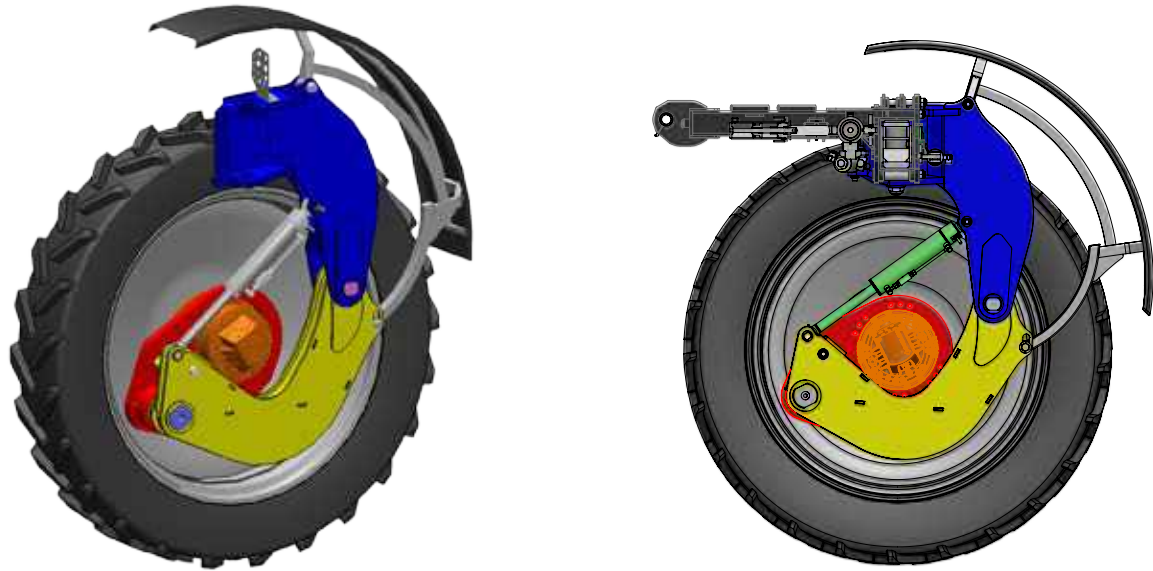

## MAF C4 - Crop Care Compact Clearance

The C4 project, proposes a range development to take MAF... beyond MAF.



A unique patented system, to combine the synergies of independent suspensions, variable height and a new powerful transmission.

The core of the project is the integration of all the kinematic mechanisms in the wheel, which is an evolution of the ALLCROP project.



## MAF C4 COMPACT

Particular attention to the development of the chassis, for an unobstructed flow of the vegetables inside.  
The MAF doesn't have any course obstacles caused by the frame as often seen in competitors models.

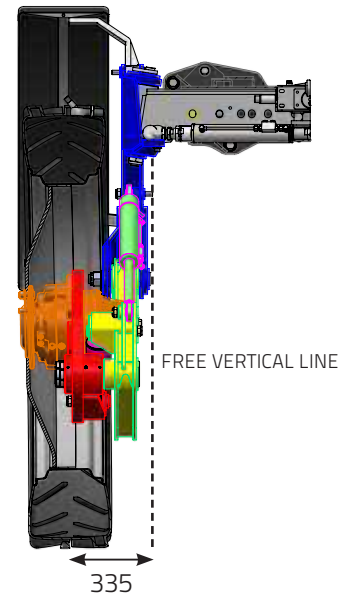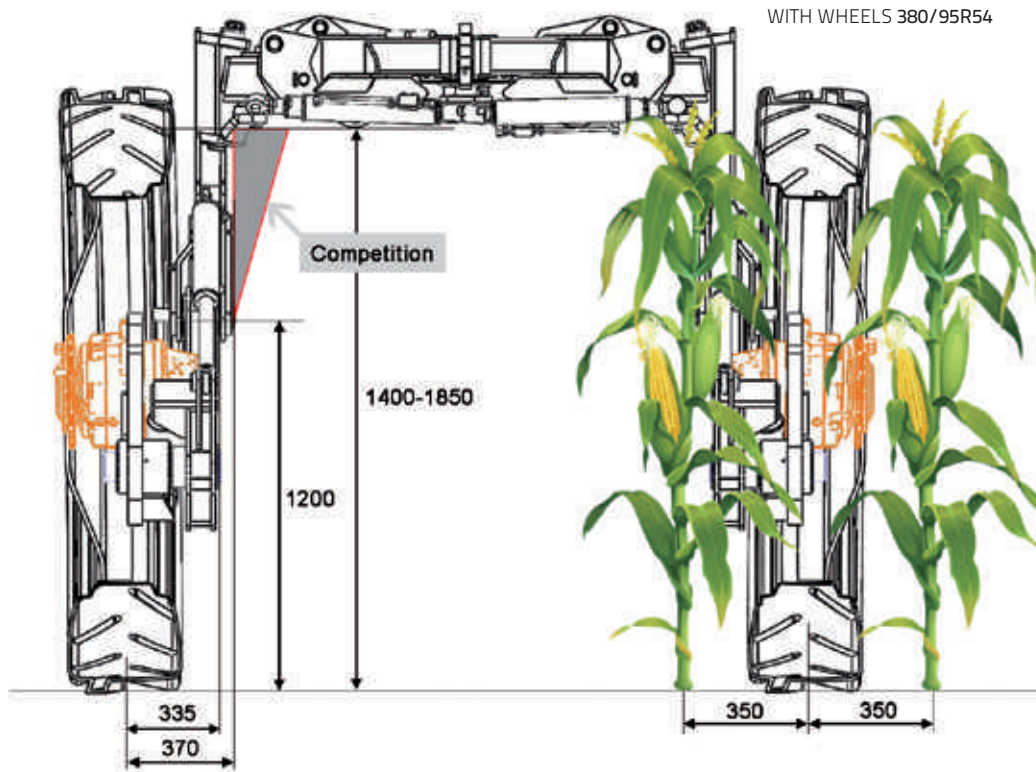

An extremely small front section to move between the rows without damaging them.



## MAF C4 CLEARANCE

Variable height from 1400 mm to 1850 mm, to protect crops with greater heights and allow for fast and safe road transport.

In a few seconds, the MAF can be positioned at 1850 mm or at 1400 mm for low crops and uneven ground.



To complete the variable height, a designated parallelogram brings the bar from 500 mm up to 3400 mm.




## MAF C4 SUSPENSION

4 independent suspensions, housed inside the wheel act in synergy with the usual MAF frame.

For even greater bar stability and increased driving comfort both during work and on the road.

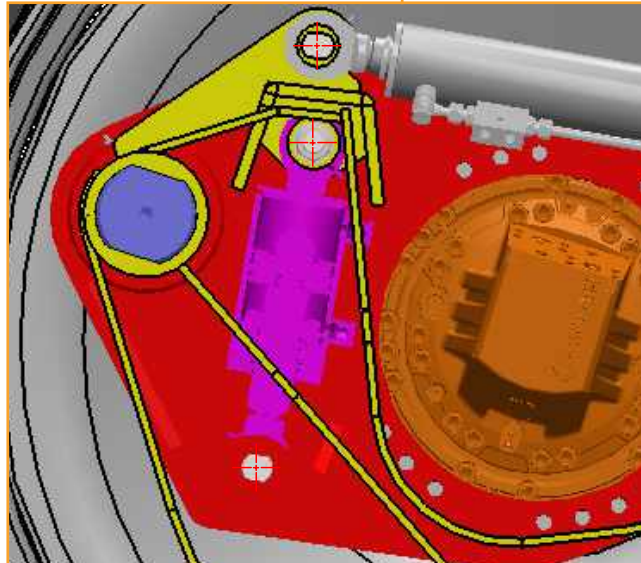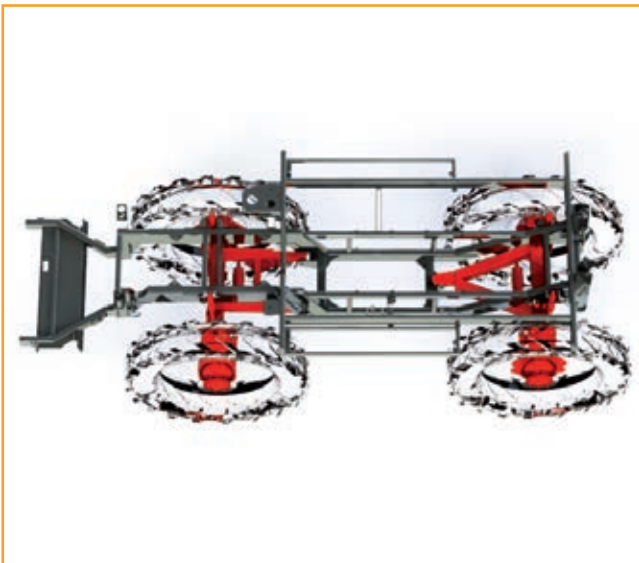

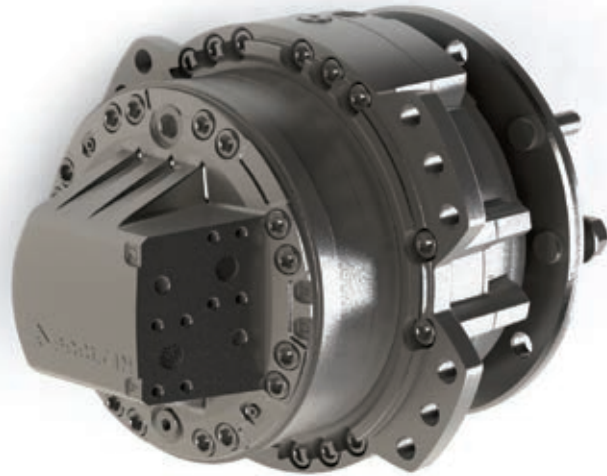

## MAF C4 TRANSMISSION

New HP MAF transmission integrated in the C4 project. Power transmitted 18% greater than the previous MAF transmission, and as an option, the TOP version with 28% greater power (\*).

### AVAILABILITY MAF C4

---

MAF HP 4240 - 4300 lt

---

MAF HP 5240 - 5300 lt

---

MAF HP 6240 - 6600 lt

---

Detailed information MAF brochure (\*)

## MAF C4

MAF C4 System	Available on all capacity of MAF HP and MAF TOP 4240 (4300 lt) - MAF HP 5240 (5300 lt) - MAF 6240
Suspension	Independent suspension each wheel
Transmission	Powerfull transmission 4 swift : <ul style="list-style-type: none"> <li>• MAF C4 HP Working 0-25 km/h - transport 0-45 Km/h</li> <li>• MAF C4 TO Working 0-25 km/h - transport 0-50 or 0-60 km/h</li> </ul>
Brakes	Version HP Nr 2 front brakes integrated Version TOP Nr 4 brakes integrated
Clearance	From 1400 mm to 1850 mm automatic adjustable from cabin
Low impact system	Front wheel impact 335 mm from center tires
Track standard	2250 mm - 2950 mm Hydraulic adjustable on each wheel
Track option	Automatic from cabin open 2950 mm - closed 2250 mm
Steering	4 steering wheels
Steering Radius	4100/5900 inner/outer
Weight distribution	50/50% each axle, full water and open boom
Wheels standard	320/90R54 MAF 4240 - 380/90R54 MAF 5240-6240
Boom	24-28-32-36 mt with air assisted as option
Total Indicative weight Kg	MAF 4240/5240/6240 C4 13600 Kg

Other information and data included into MAF HP catalogue





**MAZZOTTI** S.r.l.s.u.

via Dismano, 138/a

48124 Ravenna Italy

+39 0544 64284

+39 0544 67712

[ufficiocommerciale@mazzotti.it](mailto:ufficiocommerciale@mazzotti.it)

[www.mazzotti.it](http://www.mazzotti.it)